


# MEDIA VISION TECHNOLOGY, INC.

## PRO AUDIO STUDIO 16 (650-0091-03)

### (FUNCTIONS THE SAME AS 650-0060-03)

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	Unidentified
I/O Options	Game/MIDI port, CD-ROM audio in, SCSI interface, microphone in, stereo line in, stereo line out, speaker out
Data Bus	16-bit ISA

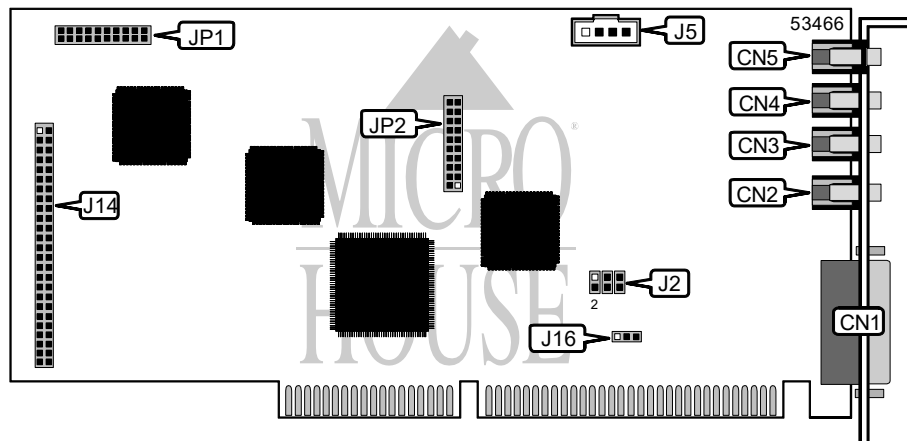

CONNECTIONS			
Function	Label	Function	Label
Game/MIDI port	CN1	Audio in - CD-ROM	J5
Microphone in	CN2	50-pin SCSI connector - internal	J14
Stereo line in	CN3	Not used	JP1
Stereo line out	CN4	Not used	JP2
Speaker out	CN5		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
DMA sharing disabled	J16	Pins 2 & 3 closed	
DMA sharing enabled	J16	Pins 1 & 2 closed	

BOARD ID SELECTION			
Setting	J2/pins 1 & 2	J2/pins 3 & 4	J2/pins 5 & 6
0	Open	Open	Open
1	Closed	Open	Open
2	Open	Closed	Open
3	Closed	Closed	Open
4	Open	Open	Closed

Note: When ID 4 is selected, the base I/O address is forced to 388h. For all other ID's the software scans for available settings. Refer to the manufacturer's documentation for possible settings.