
## ACHME COMPUTERS, INC. MS-4401 PCI VGA CARD

Video XVGA

Category Video Types Supported Video Processor Highest Resolution Advanced Logic 1280 x 1024

Supported
Data Bus Type
Memory Type PCI bus DRAM Maximum Onboard Memory 2048KB

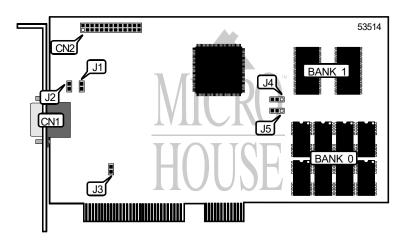

| CONNECTIONS              |          |                   |          |  |
|--------------------------|----------|-------------------|----------|--|
| Purpos :                 | Location | Purpos :          | Location |  |
| 15-pin analog video port | CN1      | Feature connector | CN2      |  |

|  | D         | RAM CONFIGURATI | ON                |                   |
|--|-----------|-----------------|-------------------|-------------------|
| Size   | Bank 0    | Bank 1          | J4                | J5                |
| 1MB  | (8) 44256 | NONE            | Pins 1 & 2 closed | Pins 1 & 2 closed |
| 2MB  | (8) 44256 | (2) 16256       | Pins 2 & 3 closed | Pins 2 & 3 closed |
| Note: 16256 chips must be installed by the manufacturer. |           |                 |                   |                   |

| FACTORY CONFIGURED SETTINGS |         |  |  |
|-----------------------------|---------|--|--|
| Jumper                      | Setting |  |  |
| J1                          | Closed  |  |  |
| J2                          | Open    |  |  |
| J3                          | Open    |  |  |