


REVEAL COMPUTER PRODUCTS

SC300 PRO

Card Type	Sound card
Chip Set	Unidentified
Maximum Onboard Memory	None
I/O Options	Line in, microphone in, volume control, speaker out, game/MIDI port, audio in - CD-ROM, CD-ROM interfaces (2), PC speaker - internal, multimedia audio connector
Data Bus	16-bit ISA

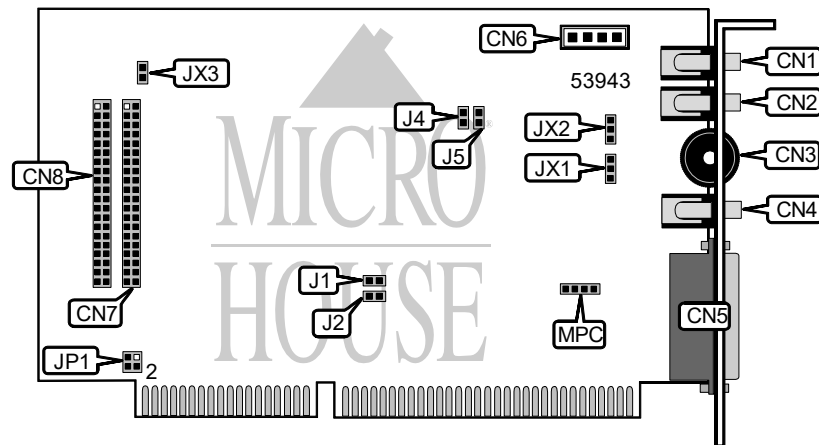

CONNECTIONS			
Function	Label	Function	Label
Line in	CN1	Audio in - CD-ROM	CN6
Microphone in	CN2	CD-ROM interface (Panasonic)	CN7
Volume control	CN3	CD-ROM interface (Mitsumi)	CN8
Speaker out	CN4	PC speaker - internal	J4
Game/MIDI port	CN5	Multimedia audio connector	MPC

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Speaker enabled	J5	Closed
Speaker disabled	J5	Open
Programmable EEPROM enabled	JX3	Closed
Programmable EEPROM disabled	JX3	Open

VIRTUAL PARALLEL PORT SELECTION		
Setting	J1	J2
Enabled	Closed	Closed
Disabled	Open	Open

Continued on next page. . .

REVEAL COMPUTER PRODUCTS

SC300 PRO

. . . continued from previous page

MITSUMI INTERRUPT SELECTION		
IRQ	JP1/pins 1 & 2	JP1/pins 3 & 4
11	Open	Closed
12	Closed	Open

MICROPHONE SELECTION		
Setting	JX1	JX2
Condenser	Pins 1 & 2 closed	Pins 1 & 2 closed
Carbon	Pins 2 & 3 closed	Pins 2 & 3 closed